



## Beissier

BEISSIER S.A.U.

Txirrita Maleo, 14  
E-20100 Errenteria (Gipuzkoa)  
T. (34) 943 344 070

[www.beissier.com](http://www.beissier.com)  
[beissier@beissier.es](mailto:beissier@beissier.es)

**Beissier**

## RENOVATION SPECIALITIES



### 90 YEARS OF ACCUMULATED EXPERIENCE

Beissier, with over 90 years of experience, is a company recognised for providing pioneering solutions for the preparation and repair of multiple substrates. This recognition and leadership is due to the ongoing collaboration between its laboratories in Spain, France and Germany, as well as research projects with universities and technological centers, which ensures that its' R & D personnel maintain the highest standards of qualification to continue developing creative and cutting-edge solutions in the industry.

The problems faced by professional decorators and contractors in their day-to-day work are varied and not always easy to solve. One of the most common is the lack of prepared substrates to be painted.....

As a market leading brand of decorating and plastering renovation products, Beissier leads the Spanish and French domestic markets not only with fillers and plasters, but also with niche speciality renovation products.



## LEADERSHIP IN RENOVATION SPECIALITIES

Export markets are increasingly demanding specialist renovation products when it comes to substrate problems in addition to just filling holes, smoothing walls or repairing cracks.

Recent investments in to product research & development, state-of-the art production facilities and continually improving efficient processes allows Beissier to present a market leading range of specialist renovation products in to the main export markets. Beissier is now the benchmark for substrate renovation solutions.

The impressive successes and leadership with in specialist renovation products achieved in our domestic markets are the best guarantee and proof by demonstration for this new Beissier integral range for substrate renovation.



# CHAMELEON

MULTI-SURFACE PRIMER



CHAMELEON PAIL 2L

70600-003  
2 UN / CTN  
WHITE



CHAMELEON PAIL 750ML

70600-001  
6 UN / CTN  
WHITE



CHAMELEON PAIL 600ML

70600-002  
6 UN / CTN  
TRANSPARENT BASE

# CHAMELEON SPRAY


MULTI-SURFACE PRIMER



CHAMELEON SPRAY 400ML

70600-005  
6 UN / CTN  
WHITE

### DISPENSER ADVANTAGES:

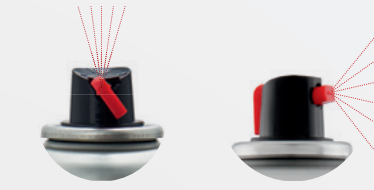

### PAINT SAVING

Thanks to the fan regulator, only the paint strictly necessary for each job is used, nothing is wasted on the edges.

### TIME REDUCTION

It is possible to use a wider fan for large surfaces, covering more area in less time. With the adjustable nozzle, the spray is always used in a vertical position, so it never stops working.

### IMPROVED ERGONOMY

The user does not need to turn the wrist in uncomfortable positions.

$\frac{m^2}{L}$  Roll/Brush: 10-16  $m^2/l$  / Spray: 6-8  $m^2/l$  | Water-based paints: 4-6h Solvent: 24 h Polyurethane / epoxy 48h | TOUCH DRY 30 min | SEMI-MATT | INT / EXT

### USES:

- Primer and finishing coat.
- Stain covering: grease, soot, ink, damp stains, nicotine, coffee, etc.

### CHARACTERISTICS:

- Excellent adhesion to multiple substrates: metal, plastic, ceramic, wood, etc.
- Rust inhibitor on metallic surfaces.
- Quick drying. Non-yellowing.
- Heat resistant: 100°C.
- Regulates substrate porosity.
- Can be overcoated with all types of traditional wall & ceiling paints.
- Solvent free.
- Water based.
- Breathable.
- White Semi-Matt finish.



### USES:

- Intermediate Coat and Primer for metallic surfaces: iron, zinc, galvanized iron, aluminum, lead, brass, copper...), plastics, rigid pvc, polyester, melamine, wood, ceramics, glass, etc.
- Interior and Exterior.

### CHARACTERISTICS:

- Can be overcoated with any water or solvent based paint.
- Anti-corrosive protection for metallic surfaces.
- Excellent adhesion and self-levelling.
- Quick drying.
- Heat resistant up to 100°C.
- No tools needed due to its adjustable spray nozzle.
- Matt finish.



# FIXACRYL

WATERBASED PRIMING & SEALING SPRAY



FIXACRYL 400ML

70237-008  
6 UN / CTN  
TRANSPARENT

$\frac{m^2}{L}$  12  $m^2 / 400ml$  | 24h | TOUCH DRY 20-30 min | INT / EXT

### USES:

- On cement, concrete, plaster, lime mortars, old painted substrates.
- Improves adhesion of paints and other wall coverings.

### CHARACTERISTICS:

- Water-based.
- Easy to apply.
- Seals and stabilises porous substrates.
- Improves scrubability of interior paints.

